



HSM V-Press 825



HSM V-Press 825 vertical baling press

The HSM V-Press 825 is characterized by its very low transport height.

Technical data

Order number:	6152254	Loading aperture width x height:	1195 x 530 mm
EAN	4026631074490	Bale length x Bale width x Bale height:	1200 x 780 x 700 mm
Pressing power:	250 kN	Bale weight:	280 kg
Specific pressing power:	26 N/cm ²	Width x Depth x Height:	1700 x 1046 x 2370 mm
Driving power:	4 kW	Weight:	1063 kg
Voltage / Frequency:	400 V / 50 Hz	Related product line:	V-Press
Cycle time when idling vacío:	39 s	Type of consumables:	Strapping tape
Volume throughput in idle operation (theor.):	7 m ³ /h	Press material:	Plastic film, Mixed paper, Cardboard, Punch waste/residue, Clothing
Loading height:	958 mm		

Product information



To fill the press, the upper half of the doors is folded down



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Low installation height and small footprint




Compresses cardboard and film

Suitable for cardboard as well as film.



Automatic start

Automatic start of the pressing process after closing the door.

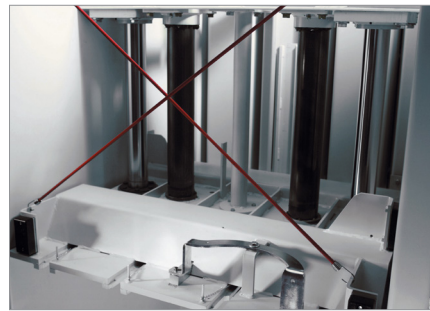

Optimized pressing

Massive press ram and extremely robust press plate guidance.



Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.




HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.



Strapping

Manual bale strapping with continuous polyester tape.



www.tuev-sued.de/ps-zert



www.hsm.eu

HSM®