



HSM V-Press 860 S


HSM V-Press 860 S vertical baling press

The model HSM V-Press 860 S is the perfect machine for the volume reduction of stiff plastics (e.g. monitor and TV set housings) and expanding plastic film (other materials upon request).

Technical data

Order number:	6148864	Loading aperture width x height:	1195 x 650 mm
EAN	4026631073707	Bale length x Bale width x Bale height:	1200 x 780 x 1200 mm
Pressing power:	434 kN	Bale weight:	230 kg
Specific pressing power:	46,37 N/cm ²	Width x Depth x Height:	1868 x 1076 x 2985 mm
Driving power:	4 kW	Weight:	2285 kg
Voltage / Frequency:	400 V / 50 Hz	Related product line:	V-Press
Cycle time when idling vacío:	25 s	Type of consumables:	Wire
Volume throughput in idle operation (theor.):	12 m ³ /h	Press material:	Plastic film, Mixed paper, Cardboard, Punch waste/residue, Clothing, Big Bags, HDPE / LDPE hollow containers & plastic bottles, Polystyrene, PET
Loading height:	1110 mm		

Product information



Reinforced press chamber and hydraulic door lock - Convenient opening and closing, no manual effort required



Robust mechanical bale ejector chain



Double quantity of retaining claws optimize the compression of the pressing material and reduce the number of loading actions



Optimized pressing

Massive press ram and extremely robust press plate guidance.



Automatic start

Automatic start of the pressing process after closing the door.




Economical, fast and silent

The HSM V-Presses are highly energy efficient thanks to the specially developed rapid stroke technology. This saves time and money.




Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.

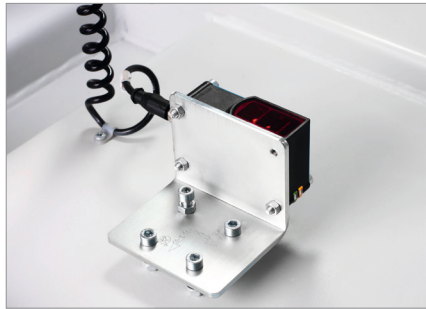

HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.

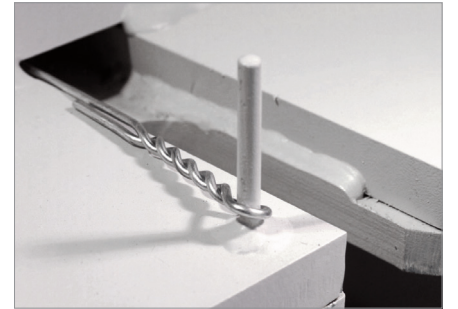

Strapping

Manual bale strapping with wire.



www.tuev-sued.de/ps-zert

www.hsm.eu

